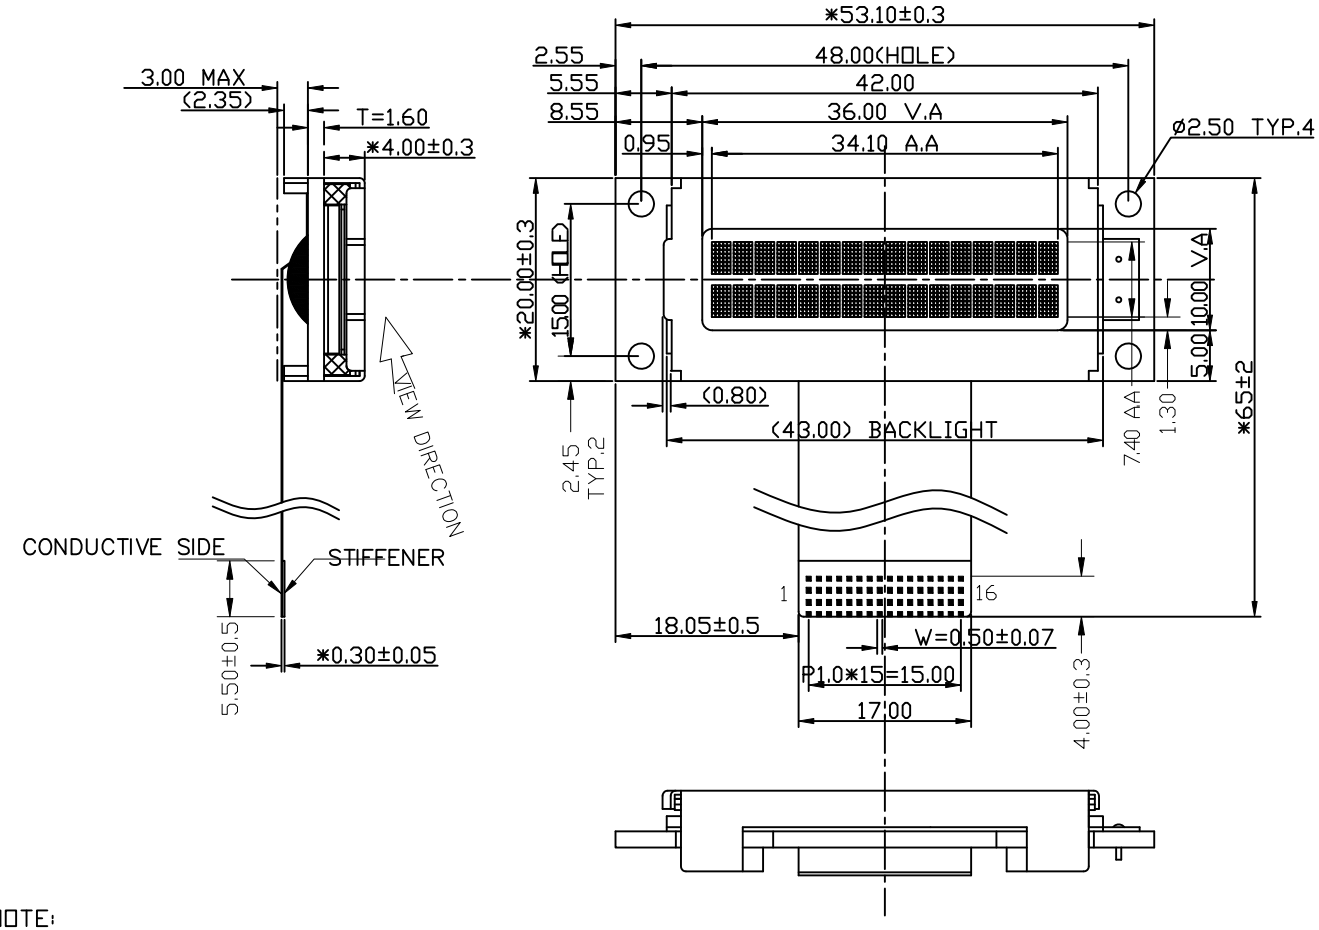

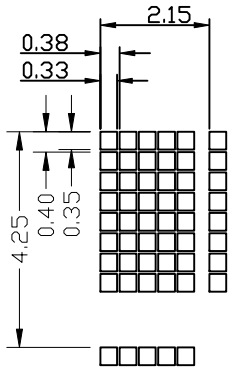

DOT DETAIL

NOTE:
1. GENERAL TOLERANCE: ±0.2.
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. COMPLIABLY RoHS.

PIN ASSIGNMENT

NO.	1	2	3	4	5	6	7	8
PIN	VSS	VDD	V0	RS	R/W	E	D0	D1
NO.	9	10	11	12	13	14	15	16
PIN	D2	D3	D4	D5	D6	D7	LED(+)	LED(-)

DISPLAY TYPE	DFSTN NEGATIVE TRANSFLECTIVE
OPERATING METHOD	1/16 DUTY 1/5 BIAS
VIEWING ANGEL	6:00
OPERATION TEMPERATURE	-20°C TO 70°C
STORAGE TEMPERATURE	-30°C TO 80°C
BACKLIGHT	WHITE
LCD Driver IC	ST7065&ST7066
Vdd	5.0V
V(LCD)	4.5V

VER.	SYMBOL	AMENDMENT	SIGN	DATE
01		first issue	XB	07.10.18

DRAWN	
ME.CHECKED	
EE.CHECKED	
PE.CHECKED	
APPROVED	
CUSTOMER'S APPROVAL	

TITLE
MODULE SPEC.

DRAWING NO.
STR-TC0623A

UNIT	mm	SCALE	FIT
3rd Angle		SHEET	1 OF 1

TRUEVISION TECHNOLOGIES LTD