


INTERFACE	
1	/VLED
2	VSS
3	VDD(5V)
4	VO
5	A0
6	E1
7	E2
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	R/W

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2017/2/10

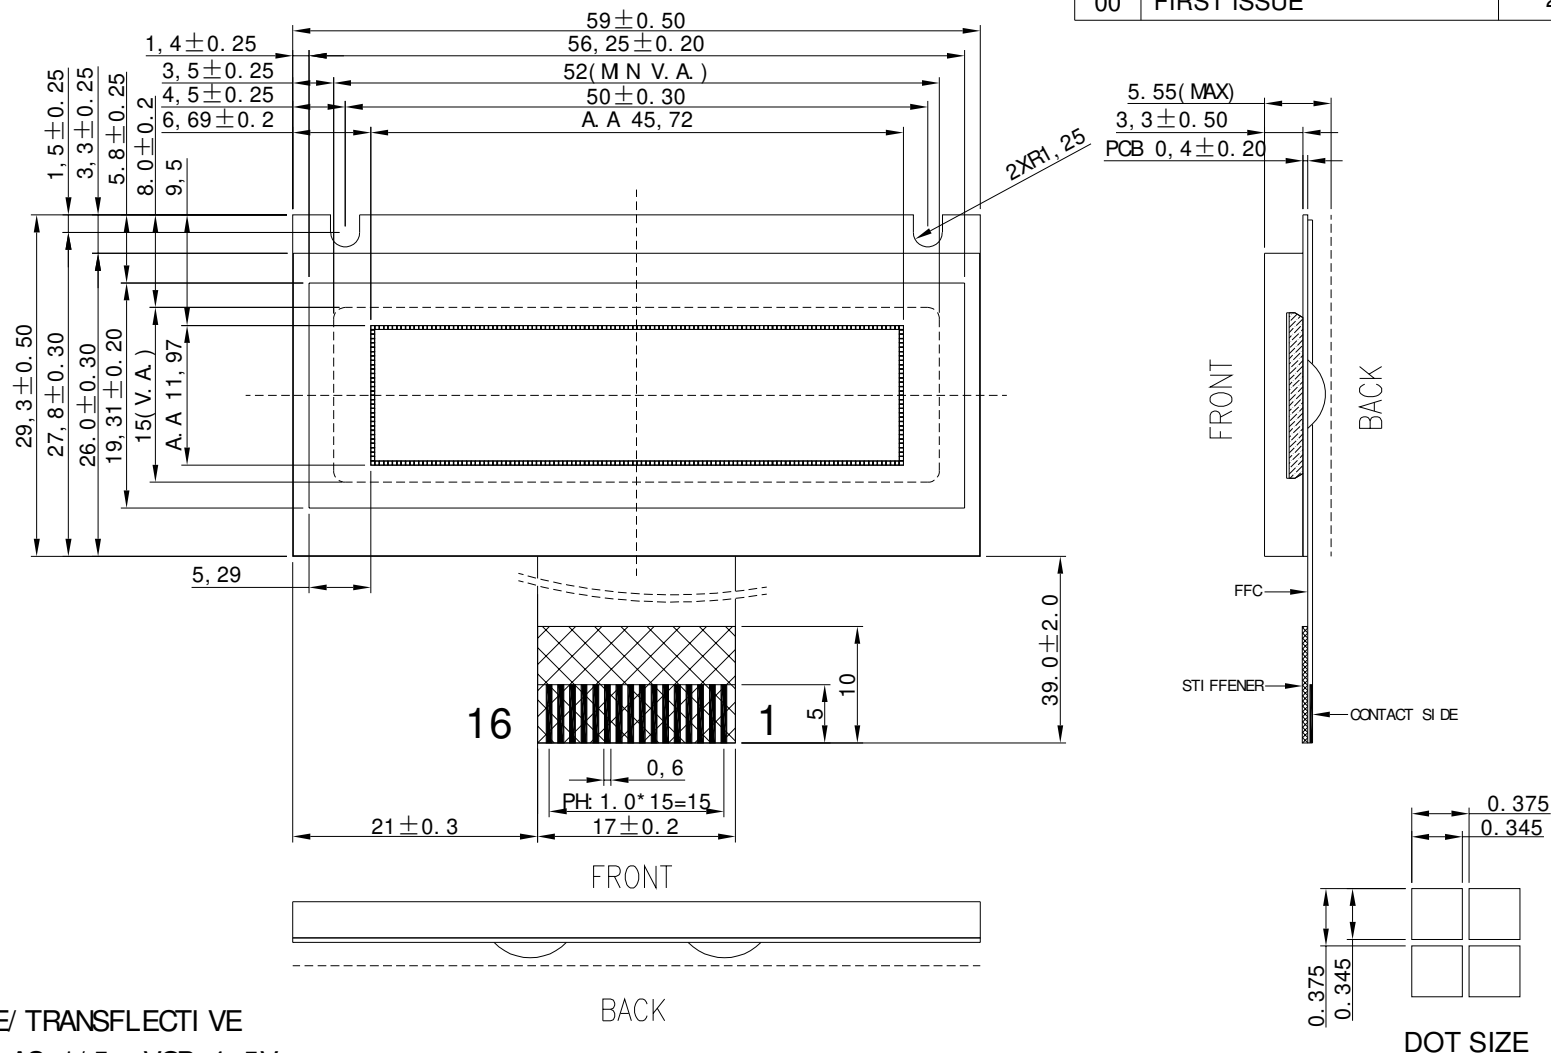

SPECIFICATION:

- 1) . FSTN POSITIVE/ TRANSFLECTIVE
- 2) . DUTY: 1/ 32. BIAS: 1/ 5. VOP=4. 5V
- 3) . VIEWING ANGLE: 6 O'CLOCK
- 4) . OPERATING TEMPERATURE: - 20~70℃
STORAGE TEMPERATURE: - 30~80℃
- 5) . BACKLIGHT: BLUE I=40MA
- 6) . DRIVE IC: AIP31520
- 7) . DRIVE POWER: VDD=5. 0V

TrueVision Technologies Limited

www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2017/2/10		HSM12232M		DATE:	2017/2/10
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							