


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	/CS1
13	/CS2
14	/RST
15	R/W
16	D/I
17	E
18	VEE
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2017-2-23

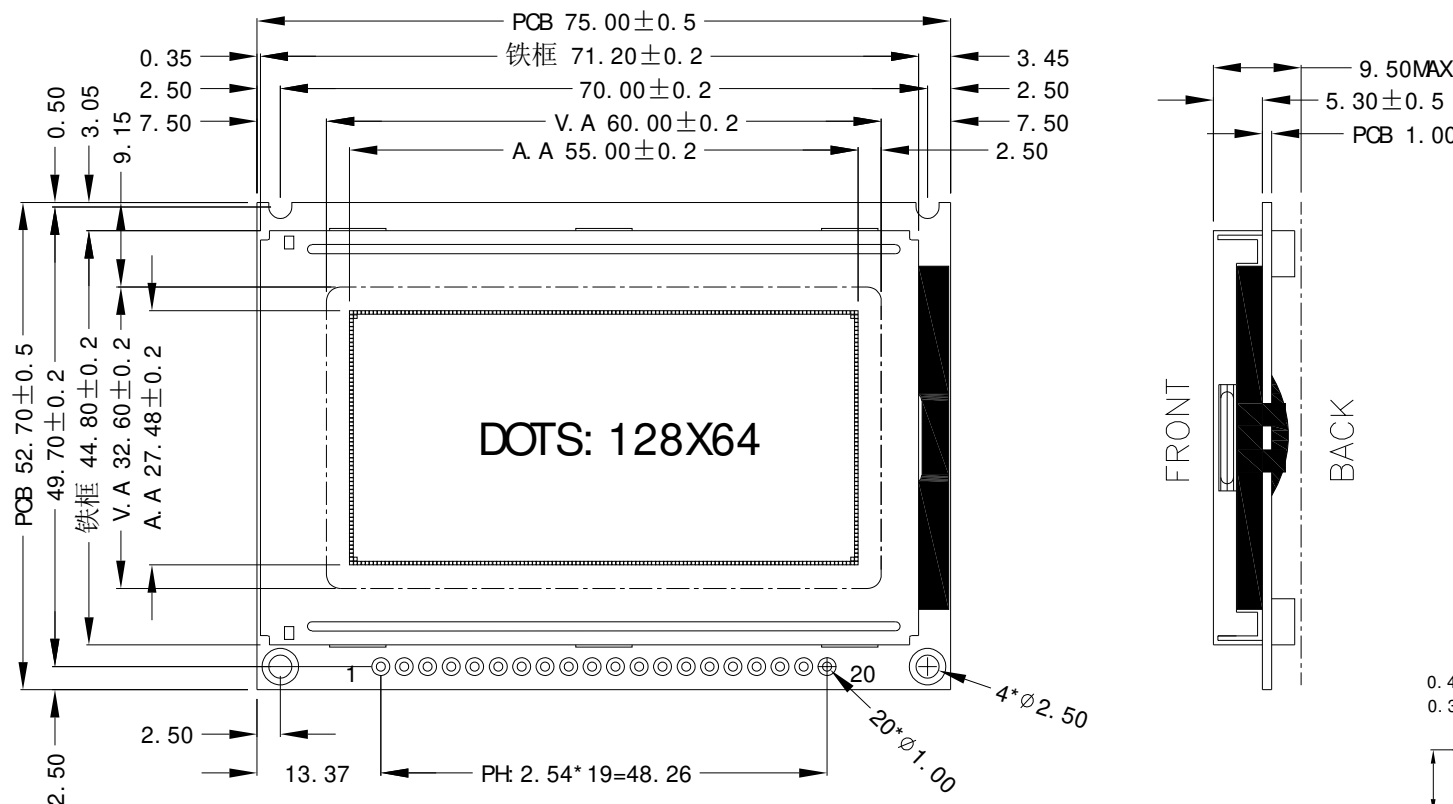

NOTES:

- DISPLAY TYPE: STN(BLUE)/NEGATIVE/TRANSMISSIVE
- OPERATING VOLTAGE: VOP=9.0V,VDD=5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/64DUTY,1/9BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: AIP31107/31108
- CONNECTOR: ZEBER
- BACKLIGHT: LED(WHITE)
- CUSTOMER'S PART ID:

TrueVision Technologies Limited

www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2017/2/23		HSM12864A-24		DATE:	2017/2/23
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							