

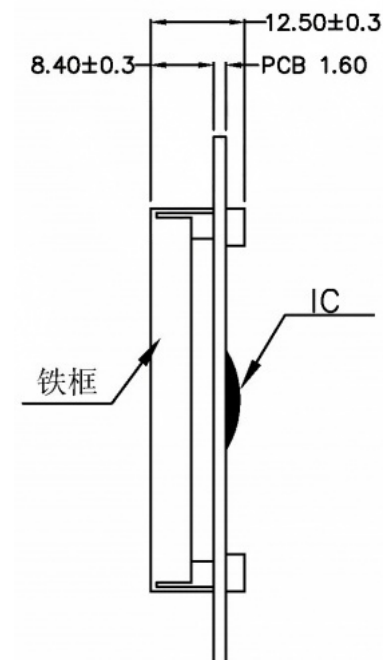


| IF | SOMBLE     |
|----|------------|
| 1  | VSS        |
| 2  | VDD(5.0V)  |
| 3  | V0         |
| 4  | /WR        |
| 5  | /RD        |
| 6  | /CE        |
| 7  | DB0        |
| 8  | DB1        |
| 9  | DB2        |
| 10 | DB3        |
| 11 | DB4        |
| 12 | DB5        |
| 13 | DB6        |
| 14 | DB7        |
| 15 | FS         |
| 16 | C/D        |
| 17 | /RST       |
| 18 | VOUT       |
| 19 | LED-A(+5V) |
| 20 | LED-K      |

| VER | DETIAL DISCRIPTION | DATE      |
|-----|--------------------|-----------|
| 00  | FIRST ISSUE        | 2012-5-16 |

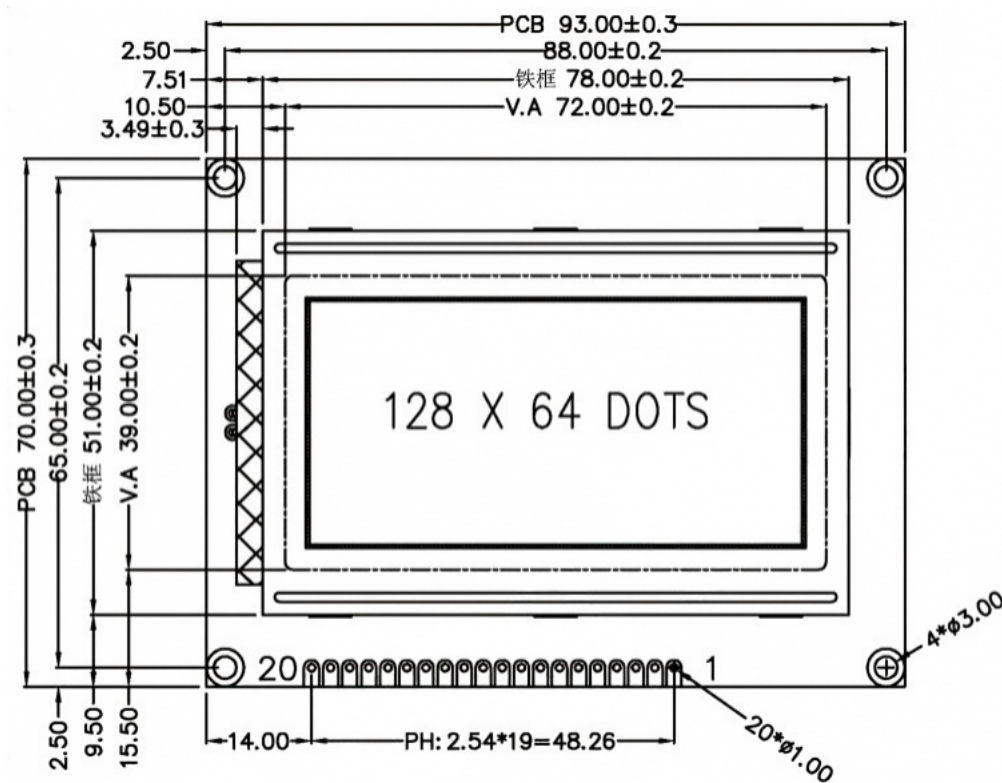

# SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=8.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70℃  
STORAGE TEMPERATURE: -30~80℃
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: T6963

TrueVision Technologies Limited [www.tvtdisplay.com](http://www.tvtdisplay.com)

|                      |           |           |       |                            |            |        |           |
|----------------------|-----------|-----------|-------|----------------------------|------------|--------|-----------|
| Unspecified Toleranc | ± 0.20    | UNITS: mm | DATE: | MODE NUMBER :              |            | SHEET: | 1 Of 1    |
| DESIGN BY:           | 吴子强 (WZQ) | 2012/5/16 |       | HSM12864K                  |            | DATE:  | 2012/5/16 |
| CHECKED BY:          |           |           |       |                            |            |        |           |
| CUSTOM NO:           |           |           |       | DO NOT SCALE THIS DRAWING. | PROJECTION |        |           |