


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CSA
13	CSB
14	RST
15	R/W
16	RS
17	E
18	VEE
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2012-8-20

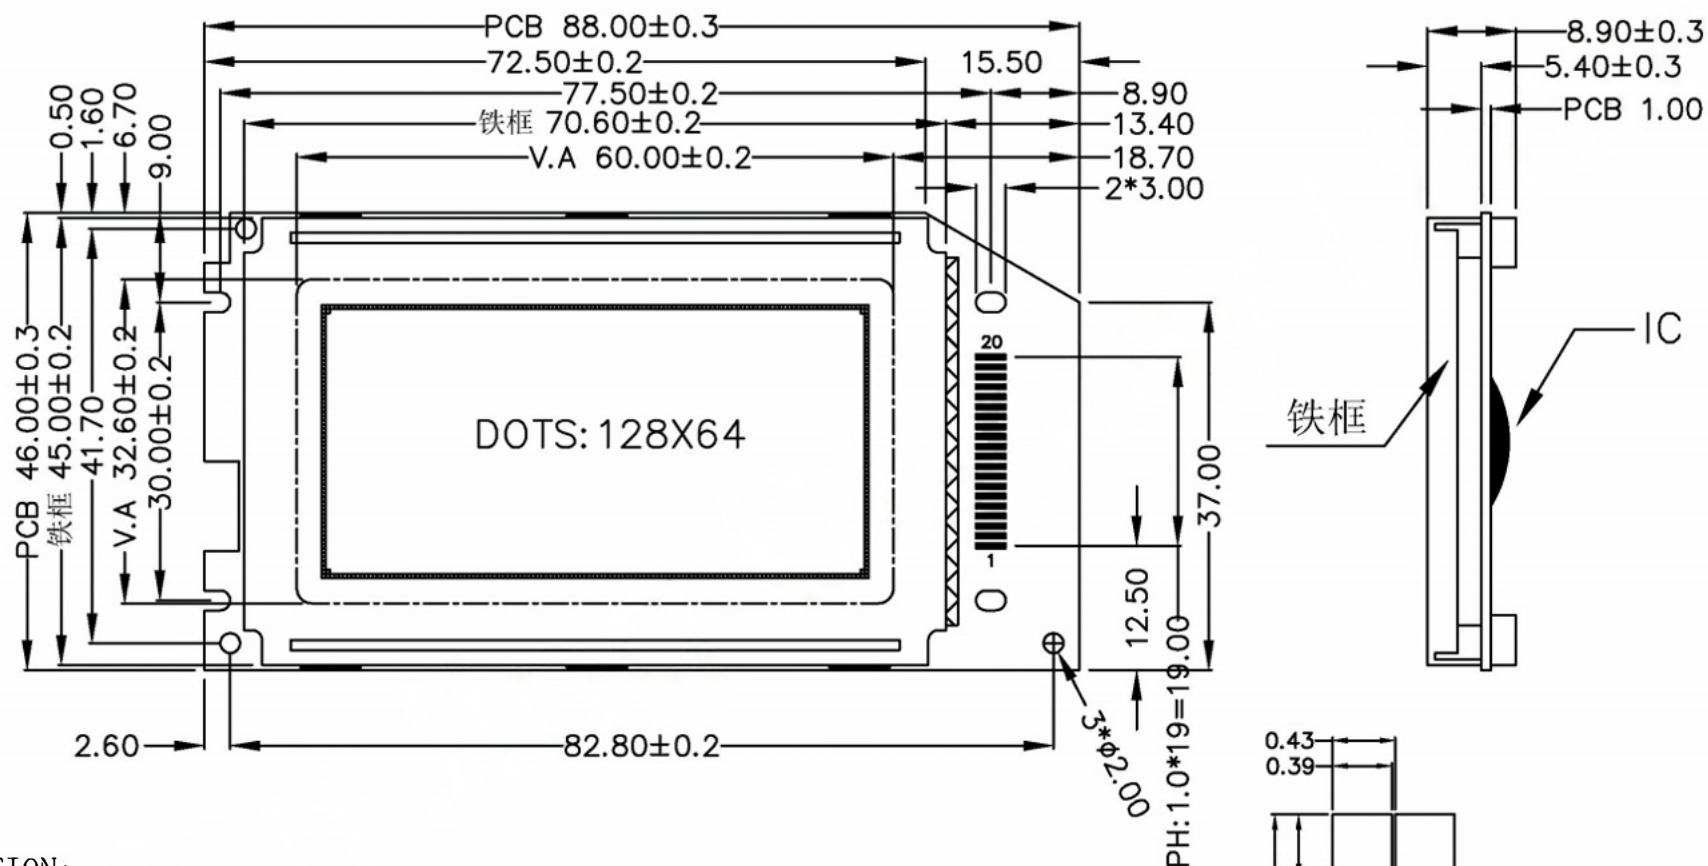

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=10.0V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 6). BACKLIGHT: WHITE I=80mA
- 7). DRIVE IC: 0107, 0108

TrueVision Technologies Limited www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 OF 1
DESIGN BY:	WZQ	2012/8/20		HSM12864L		DATE:	2012/8/20
CHECKED BY:							
CUSTOM NO:				DO NOT SCALE THIS DRAWING.	PROJECTION		