

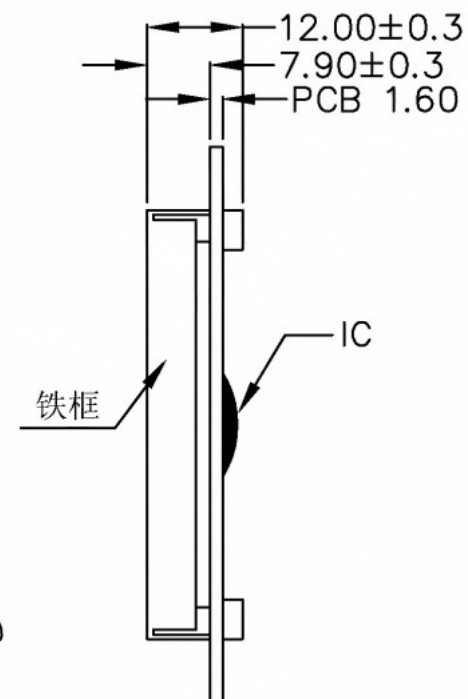


IF	SOMBLE
1	VSS
2	VDD(5V)
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	N.C
17	RST
18	VOUT
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2010-06-17

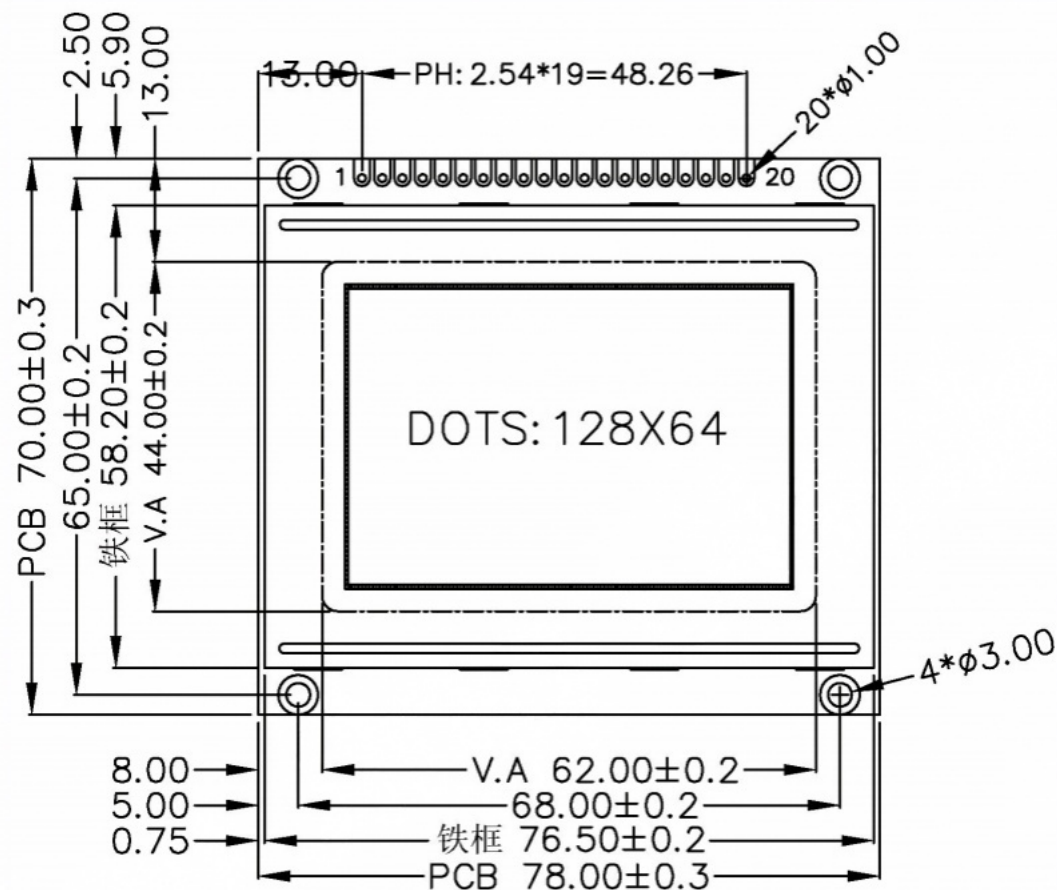

DOT SIZE:

SPECIFICATION:

- 1). STN(GARY)/POSITIVE/TRANSFLECTIVE
- 2). DUTY:1/32. BIAS:1/6. VOP=5.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: ST7920

TrueVision Technologies Limited www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2011/8/29		HSM12864S		DATE:	2011/8/23
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							