

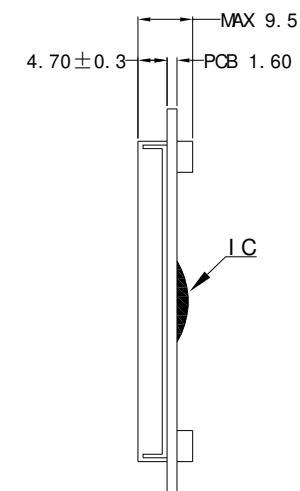


| INTERFACE |         |
|-----------|---------|
| 1         | VSS     |
| 2         | VDD     |
| 3         | V0      |
| 4         | VEE     |
| 5         | RS      |
| 6         | R/W     |
| 7         | E       |
| 8         | DB0     |
| 9         | DB1     |
| 10        | DB2     |
| 11        | DB3     |
| 12        | DB4     |
| 13        | DB5     |
| 14        | DB6     |
| 15        | DB7     |
| 16        | /CS1(L) |
| 17        | /CS2(L) |
| 18        | /CS3(L) |
| 19        | /RST    |

| VER | DETIAL DISCRIPTION | DATE      |
|-----|--------------------|-----------|
| 00  | FIRST ISSUE        | 2016/6/14 |

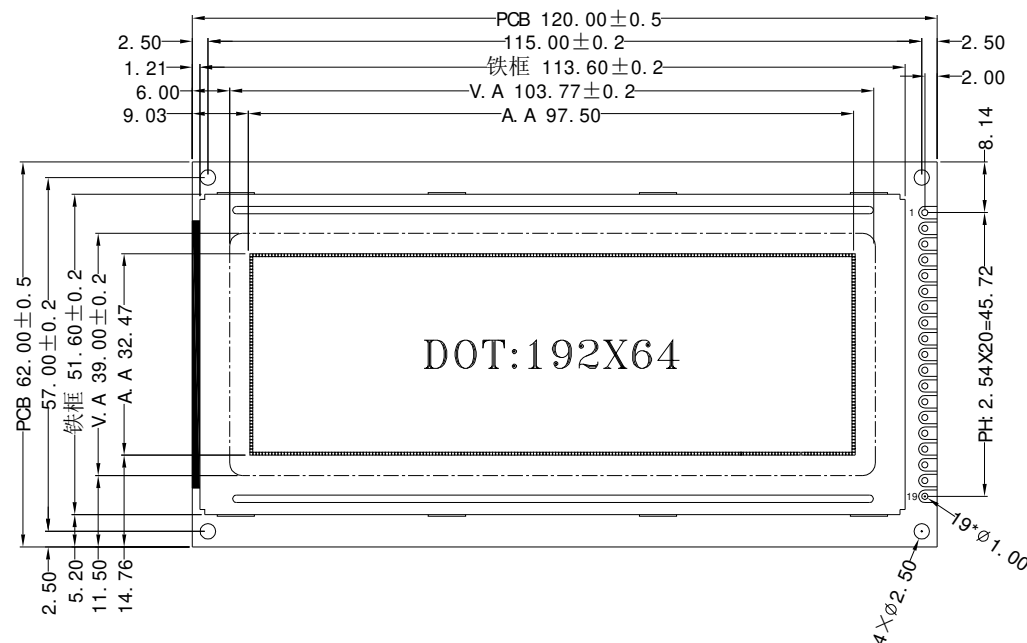

#### NOTES:

- DISPLAY TYPE: FSTN/POSITIVE/REFLECTIVE
- OPERATING VOLTAGE: VOP=10.5V,VDD=3.3-5.0V
- OPERATING TEMPERATURE: -20°C~+70°C
- STORAGE TEMPERATURE: -30°C~+80°C
- DRIVE MODE: 1/64DUTY,1/9BIAS
- VIEWING DIRECTION: 6:00
- DRIVE IC: NT7107,NT7108
- CONNECTOR: ZEBER
- BACKLIGHT: -----
- CUSTOMER'S PART ID:

**TrueVision Technologies Limited**

[www.tvtdisplay.com](http://www.tvtdisplay.com)

|                        |       |           |       |                            |            |        |           |
|------------------------|-------|-----------|-------|----------------------------|------------|--------|-----------|
| Unspecified Tolerance: | ±0.20 | UNITS: mm | DATE: | MODE NUMBER :              |            | SHEET: | 1 Of 1    |
| DESIGN BY:             | WZQ   | 2016/6/14 |       | <b>HSM19264B-1</b>         |            | DATE:  | 2016/6/14 |
| CHECKED BY:            |       |           |       | DO NOT SCALE THIS DRAWING. | PROJECTION |        |           |
| CUSTOM NO:             |       |           |       |                            |            |        |           |