


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	/RST
5	RS(CS)
6	R/W(SID)
7	E1
8	E2
9	PSB
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	LED-A(5V)
19	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2013-9-9

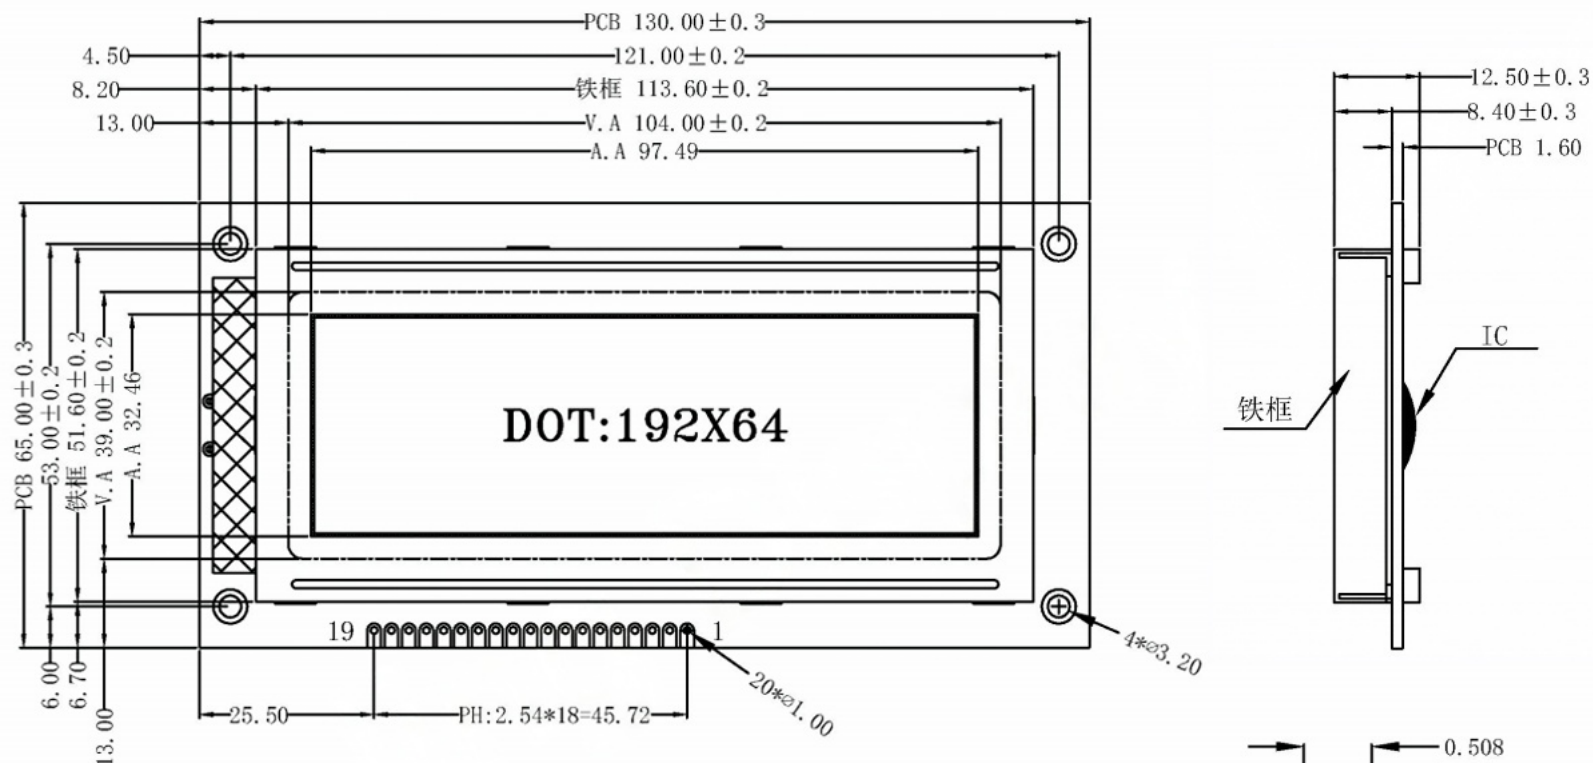

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/32. BIAS:1/6. VOP=5.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 6). BACKLIGHT: WHITE I=80mA
- 7). DRIVE IC: ST7920

TrueVision Technologies Limited www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 OF 1
DESIGN BY:	WZQ	2013/9/9		HSM19264M		DATE:	2013/9/9
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		