


INTERFACE:			
INT1		INT2	
1	FG	1	FG
2	VSS	2	VSS
3	VCC(5V)	3	VCC(5V)
4	V0	4	V0
5	WR	5	WR
6	RD	6	RD
7	CS	7	CS
8	C/D	8	C/D
9	N.C	9	RST
10	RST	10	DB0
11	DB0	11	DB1
12	DB1	12	DB2
13	DB2	13	DB3
14	DB3	14	DB4
15	DB4	15	DB5
16	DB5	16	DB6
17	DB6	17	DB7
18	DB7	18	FS
19	FS	19	VEE
20	VEE	20	LED+(5V)
21	LED+(5V)	21	LED-
22	LED-		

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2012-10-9

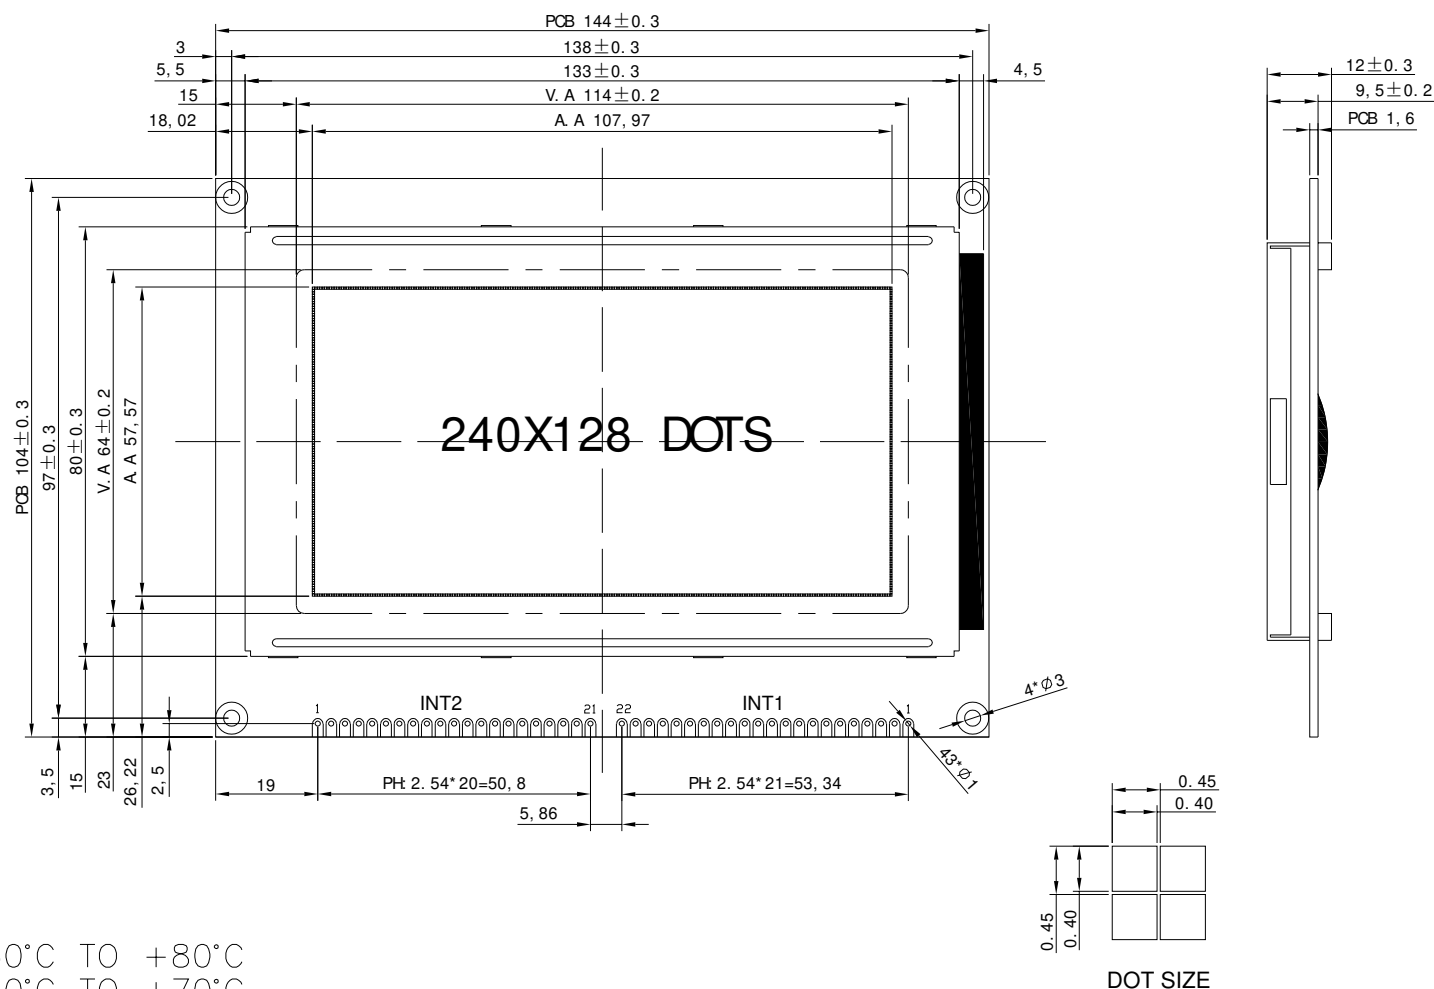

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/128 DUTY, 1/12 BIAS,VOP=18V
 DISPLAY MODE : STN TRANSFLECTIVE POSITIVE(Y-G)
 BACK LIGHT ITEM: Y-G,I=120mA
 LCM OPERATING VOLTAGE: 5.0V
 CONTROLLER/DRIVER IC: RA6963

TrueVision Technologies Limited

www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2012/10/9		HSM240128B-1		DATE:	2012/10/9
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							