


INTERFACE			
J1/J4		J2/J3	
1	VSS	1	FG
2	VDD(5V)	2	V0
3	V0	3	VEE
4	/WR	4	VSS
5	/RD	5	VDD(5V)
6	/CS	6	CP
7	A0	7	LP
8	/RES	8	M
9	DB0	9	FLM
10	DB1	10	DIS
11	DB2	11	D3
12	DB3	12	D2
13	DB4	13	D1
14	DB5	14	D0
15	DB6	15	LEDA
16	DB7	16	LEDK
17	LEDA		
18	VEE		
19	LEDA		
20	LEDK		

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2013-1-28

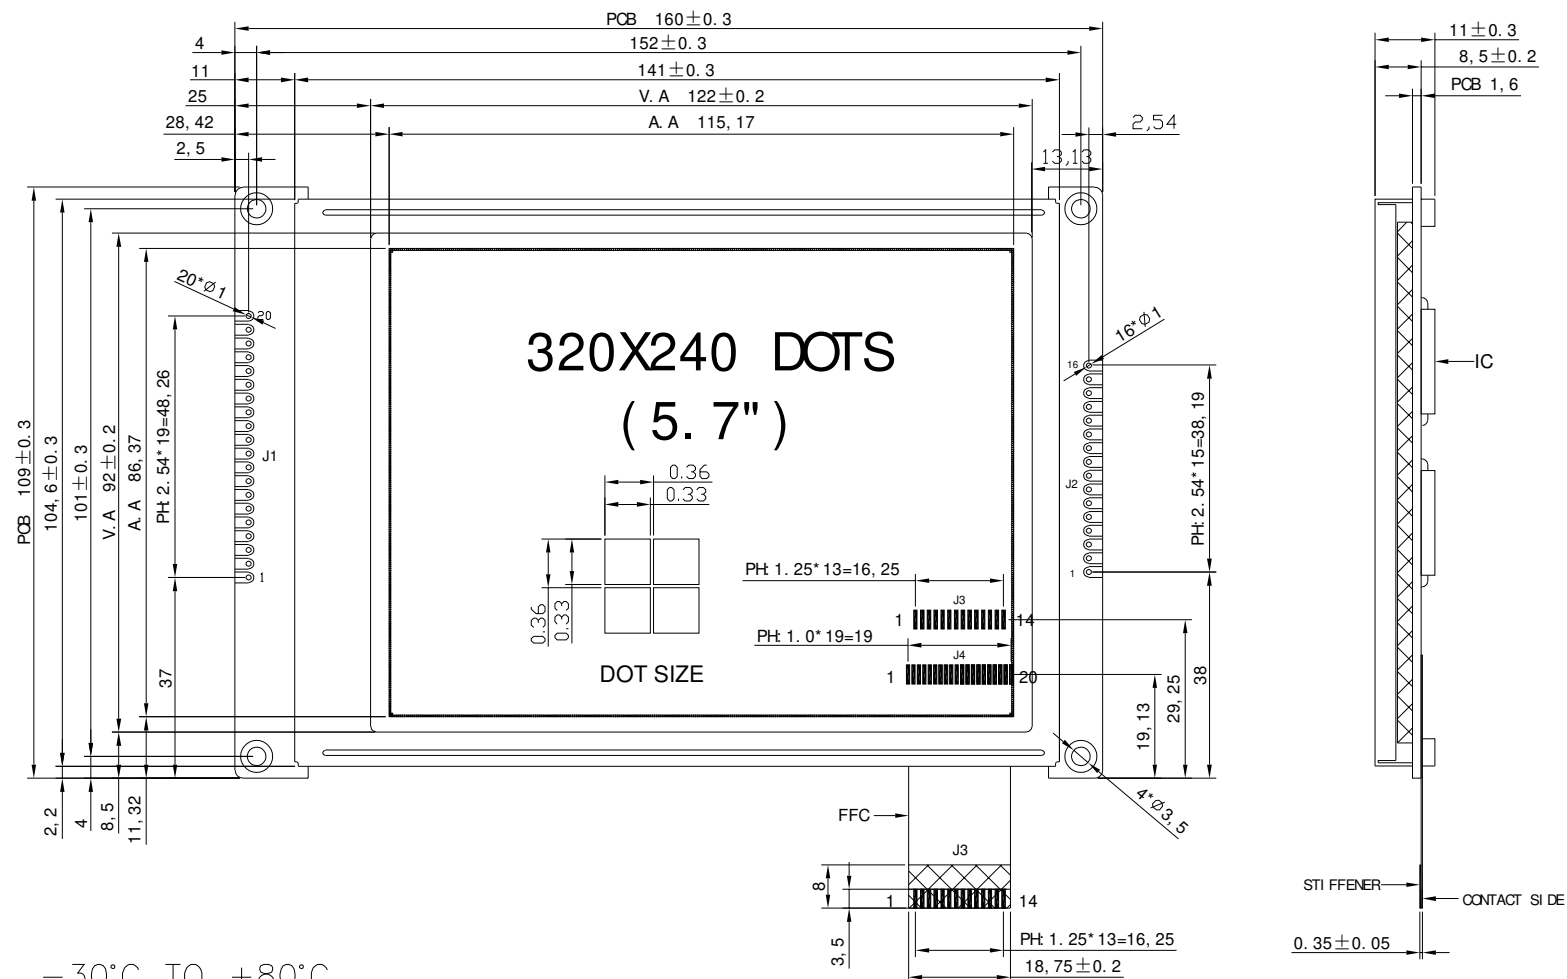

SPECIFICATIONS

STORAGE TEMP : -30°C TO $+80^{\circ}\text{C}$
 OPERATING TEMP : -20°C TO $+70^{\circ}\text{C}$
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240 DUTY, 1/17 BIAS,VOP=23V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE,I=160mA
 LCM OPERATING VOLTAGE: 5.0V
 CONTROLLER/DRIVER IC: RA8835

TrueVision Technologies Limited

www.tvtdisplay.com

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2013/1/28		HSM320240B		DATE:	2013/1/28
CHECKED BY:							
CUSTOM NO:				DO NOT SCALE THIS DRAWING.	PROJECTION		