

INTERFACE:




1	VSS
2	VCC(5V)
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VEE
19	LEDA
20	LEDK

VER DETIAL DISCRIPTION

00 FIRST ISSUE

DATE

2012-11-10

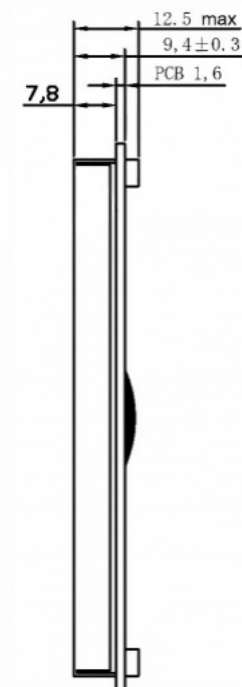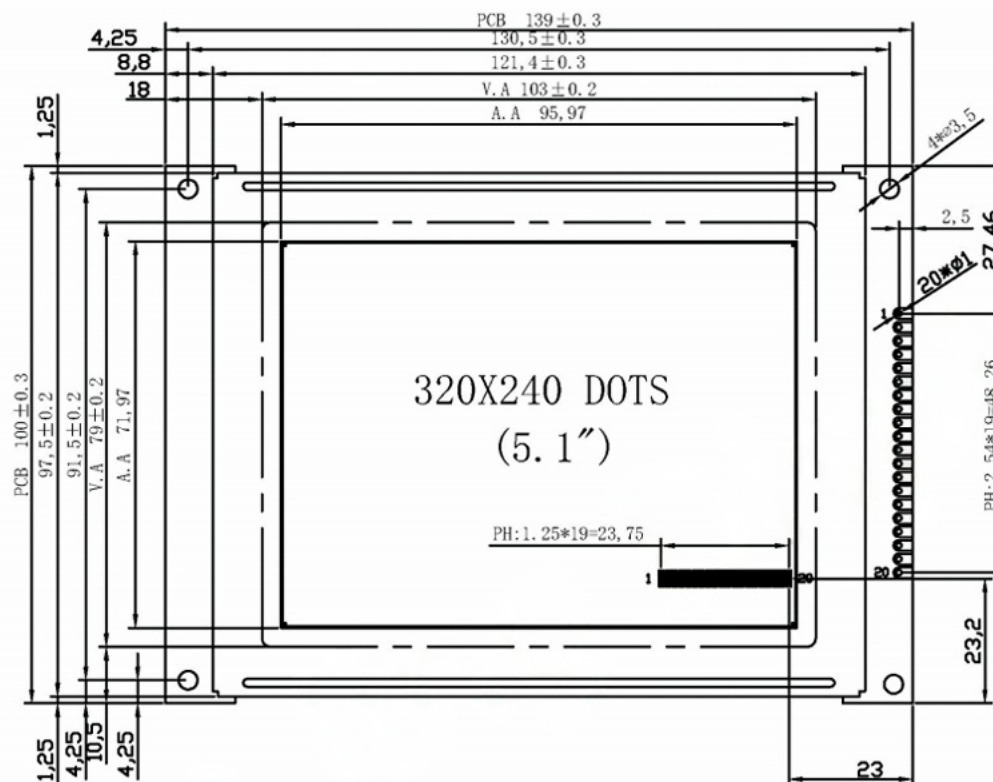

DOT SIZE

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240DUTY, 1/16 BIAS,VOP=25V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE I=160mA
 LCM OPERATING VOLTAGE5.0V
 CONTROLLER/DRIVER IC:RA8835

TrueVision Technologies Limited www.tvtdisplay.com

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 OF 1
DESIGN BY:	WZQ	2012/11/10		HSM320240C		DATE:	2012/11/10
CHECKED BY:				DO NOT SCALE THIS DRAWING	PROJECTION		
CUSTOM NO:							