

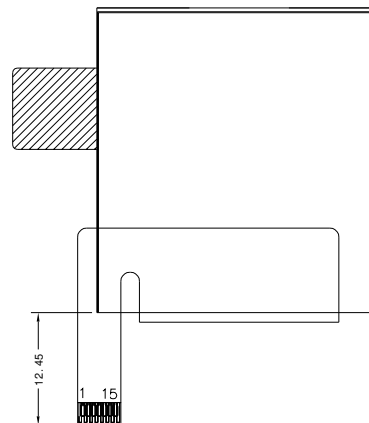
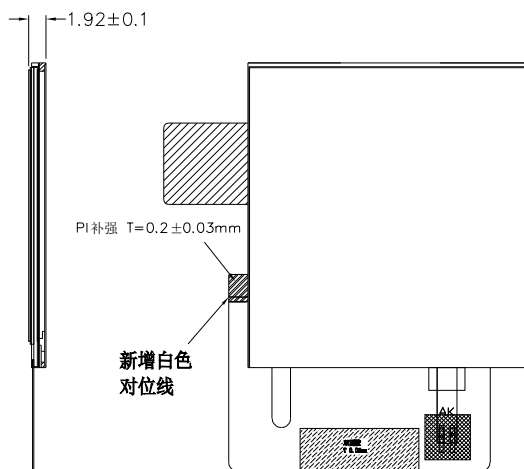


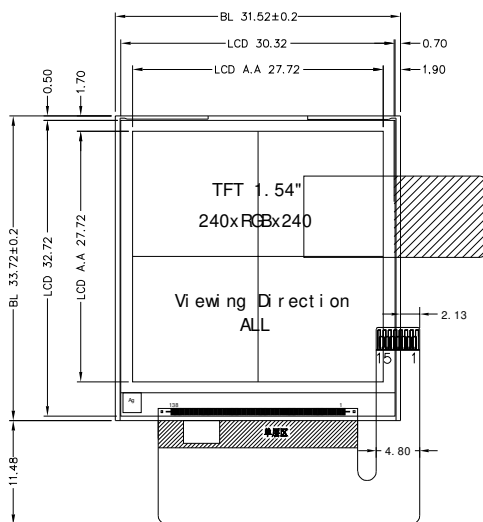

1	LEDK
2	GND
3	FMARK
4	SDA
5	SCLK
6	RS
7	CS
8	RESET
9	IOVCC 1.8V
10	VCC 2.8V
11	VCC 2.8V
12	GND
13	GND
14	LEDA
15	LEDA

LCD型号/类型/分辨率	BCE1.54/IPS/240°240
视角方向	ALL
偏光片	上磨97°/下光173°
驱动IC	ST7789T3
LED颗数/连接方式/电流	3-LED/并联/60mA

- 技术要求:
- 带*尺寸为重点尺寸,带()尺寸为参考尺寸
 - LCD切割断面崩边 $\leq 1/3$ (单层LCD厚度)
 - 平面翘曲度 $\leq 0.35\text{mm}$
 - 符合RoHS指令
 - 工作温度: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 - 储存温度: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
 - 建议TP V.A开窗比LCD A.A单边大0.4mm
 - 泡棉开窗比LCD A.A单边大0.3mm



LED CIRCUIT DIAGRAM

REV	SIGN	DESCRIPTION	PI C	DATE
A		在原TFT015H010-V7基础上改用BCE玻璃	KZH	2022.07.06

PART DESCRIPTION	LCM		TrueVision Technologies Limited www.tvtdisplay.com			
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SHEET NUMBER 1 of 1
CHECKED			PART NUMBER			DRAWING REV. A
APPROVED			MODEL NAME	TFT015B003-A0		PART NUMBER VER. N/A