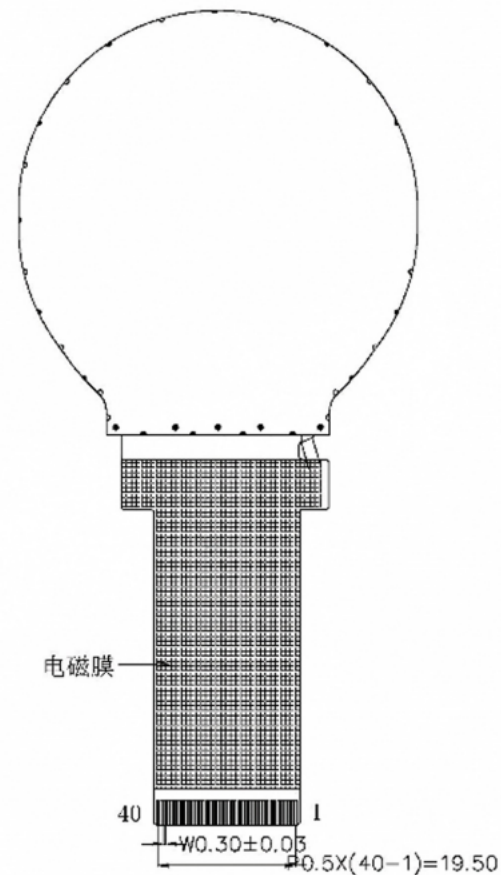
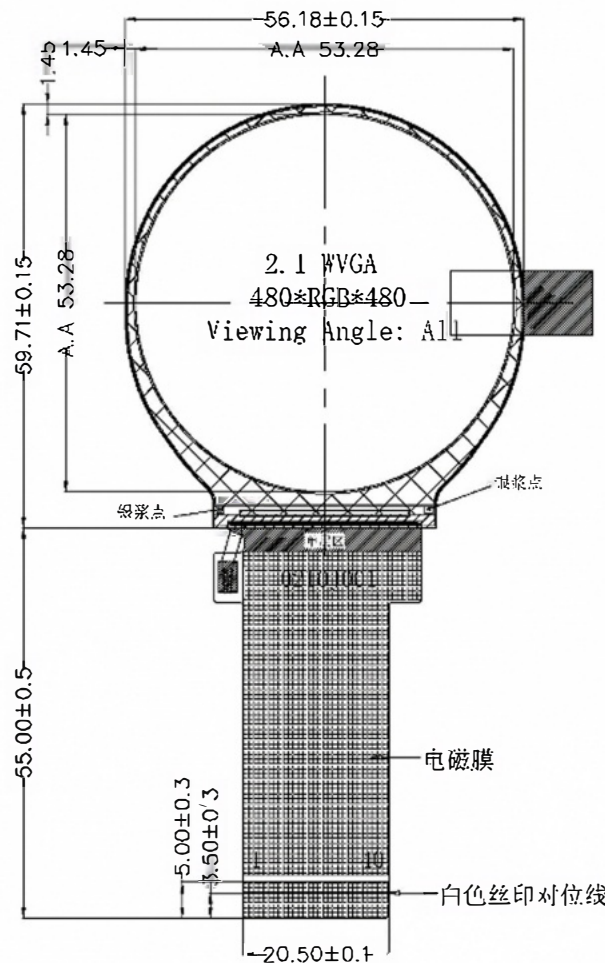


- 技术要求:
- 带*尺寸为重点尺寸, 带<>尺寸为参考尺寸
 - LCD切割断面底边≤1/3 (单层LCD厚度)
 - 平面扭曲度≤0.35mm
 - 符合RoHS指令
 - 工作温度: -20℃~70℃
 - 储存温度: -30℃~50℃
 - 建议TP V.A开窗之LCD A.A单边大0.4mm
 - 泡棉开窗比LCD A.A单边大0.3mm

REV	SIGN	DESCRIPTION	P.L	DATE
A		首次发行	LCF	2024.04.28

PART DESCRIPTION		LCM				Truevision Technologies Limited			
						www.tvtdisplay.com			
DESIGNED				UNIT	SCALE	3rd ANGLE	SIZE	SHEET NUMBER	
				mm	1.00		A4	1 of 1	
CHECKED				PART NUMBER				DRAWING REV.	
								A	
APPROVED				MODEL NAME				PART NUMBER	
				TFT021T005-C0				N/A	

PIN	SYMBOL
1	LEDA
2	LEDK
3	LEDK
4	GND
5	VCI
6	RESET
7	NC
8	NC
9	SDA
10	SCK
11	CS
12	PCLK
13	DE
14	VSYNC
15	HSYNC
16~33	DB0~DB17
34	GND
35	NC
36	NC
37	NC
38	NC
39	NC
40	GND

LCD显示/分辨率/刷新	2.1/IPS/480*480
视角方向	ALL
背光	LED背光/亮度500
驱动IC	ST7703
接口类型/连接方式/电压	1 LED并接/S0MA