

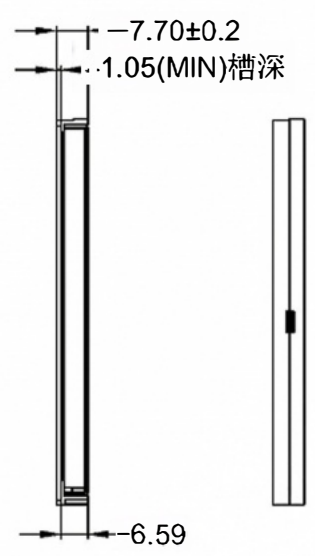
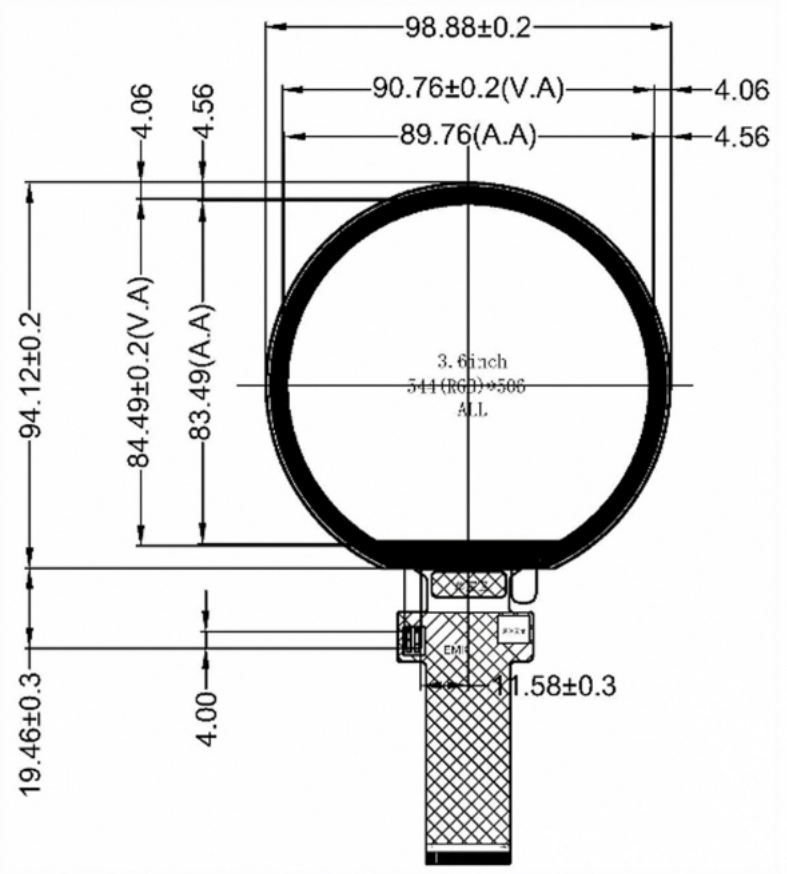


A
B
C
D



3-12.5*3.5H

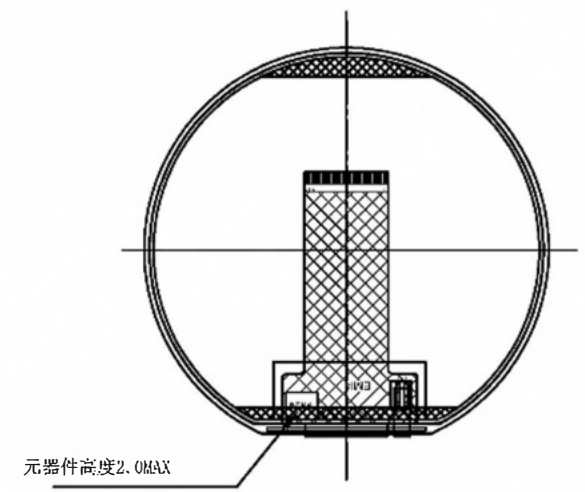

1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYN
34	DEN
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

- NOTE:
1. DISPLAY MODE : 3.6 TPS ,16.7M COLOR STRANSMISSIVE, NORMALLY BLACK
 2. Driver IC:ST72566
 3. Viewing Direction: ALL O' Clock
 4. Operating Temperature: -35° - +85°
 5. Storage Temperature: -35° - -85°
 6. Backlight Type:20 White LEDS,5串4并
 7. BL Input Current: 180 mA
 8. LCM Brightness: 1000 cd/m MIN

凡是客户做全贴合，考虑到LCM材料公差，LCM组装公差，CTP贴合公差，CTP
丝印公差，建议CTP内丝印开窗在每AA区单边外扩0.2MM。
标注“*”的尺寸为最小背光尺寸
未标注公差：±0.2

VO	首次发行	HW	2022.4.28
REV	DESCRIPTION	PIC	DATE

PART DESCRIPTION	LCM		TrueVision Technologies Limited www.tvtdisplay.com			
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SIZE A4
CHECKED			PART NUMBER			1 of 1
APPROVED			MODEL NAME			DRAWING REV. A
					TFT036B004	N/A