

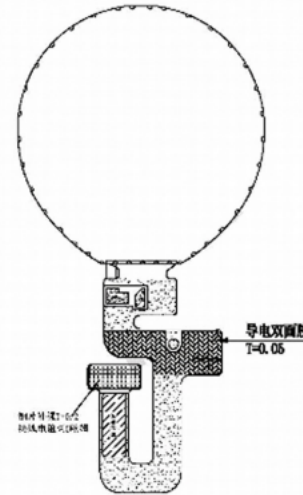


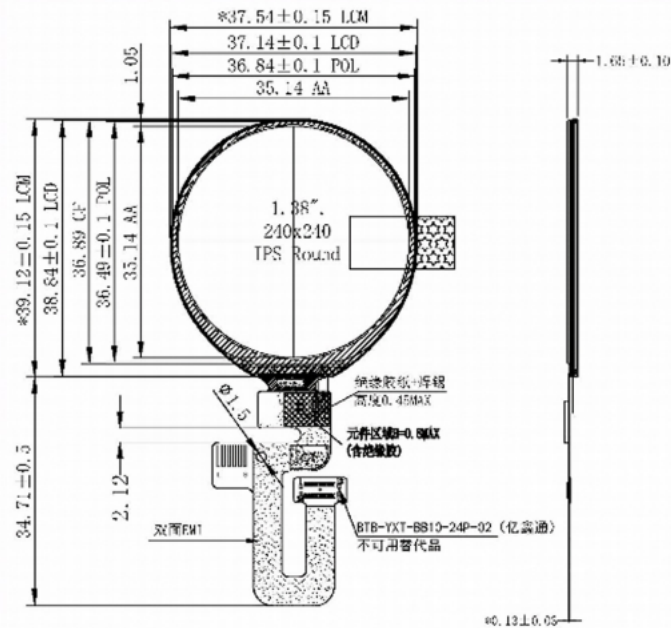

FPC展开出货

LED EIRCET DLGRAM



If- 60rn Vt-2.8^3.2c

技术要求:

- 带*尺寸为重点尺寸,带()尺寸为德考尺寸
- IC0划制断面展边之1/3<单层(CD厚度)
- 平面解肉度≤0.35m
- 符合RoHS指令
- 工竹温度:-20℃~70℃
- 请存温度:-30℃~80℃
- 建设IP W A开窗H LCD AA 单边大0.4m
- 泡棉开窗ELCD 3.方单边大0.3m

A	当改发行	XZ:	2 w22.22.3.1
SLin	DLSRIPTIQW	TI	DAT=

=aR~ PFSC3TTIaN		LCM		TrueVision Technologies Limited	
DESIGNED				www.tvtdisplay.com	
CHECKED				南中4	
APPRONHI)				TFT138B005	

L X P()	
PIN	Aswignent
1	L R T
2	0 0
3	0 0
4	0 0
5	0 0
6	0 0
7	0 0
8	0 0
9	0 0
10	0 0
11	0 0
12	0 0
13	0 0
14	0 0
15	0 0
16	0 0
17	0 0
18	0 0
19	0 0
20	0 0
21	0 0
22	0 0
23	0 0
24	0 0
TPPD	
PIN	Aswignent
1	Vo
2	TP_DF
3	TP_RST
4	TP_Sh
5	PSL
6	0

D 型号/类型/分辨率	OK1.88 / PS/240*24C/1=1.2 SKK
视觉方自	ALL
贴片方式	上细劲0°/下增充90°
弱动10	NV30022
LEO联数/连接方式/电流	FLED/并联/80mA
摘组亮度	SECed/n2MN0.CCCed/n2(TYP)