



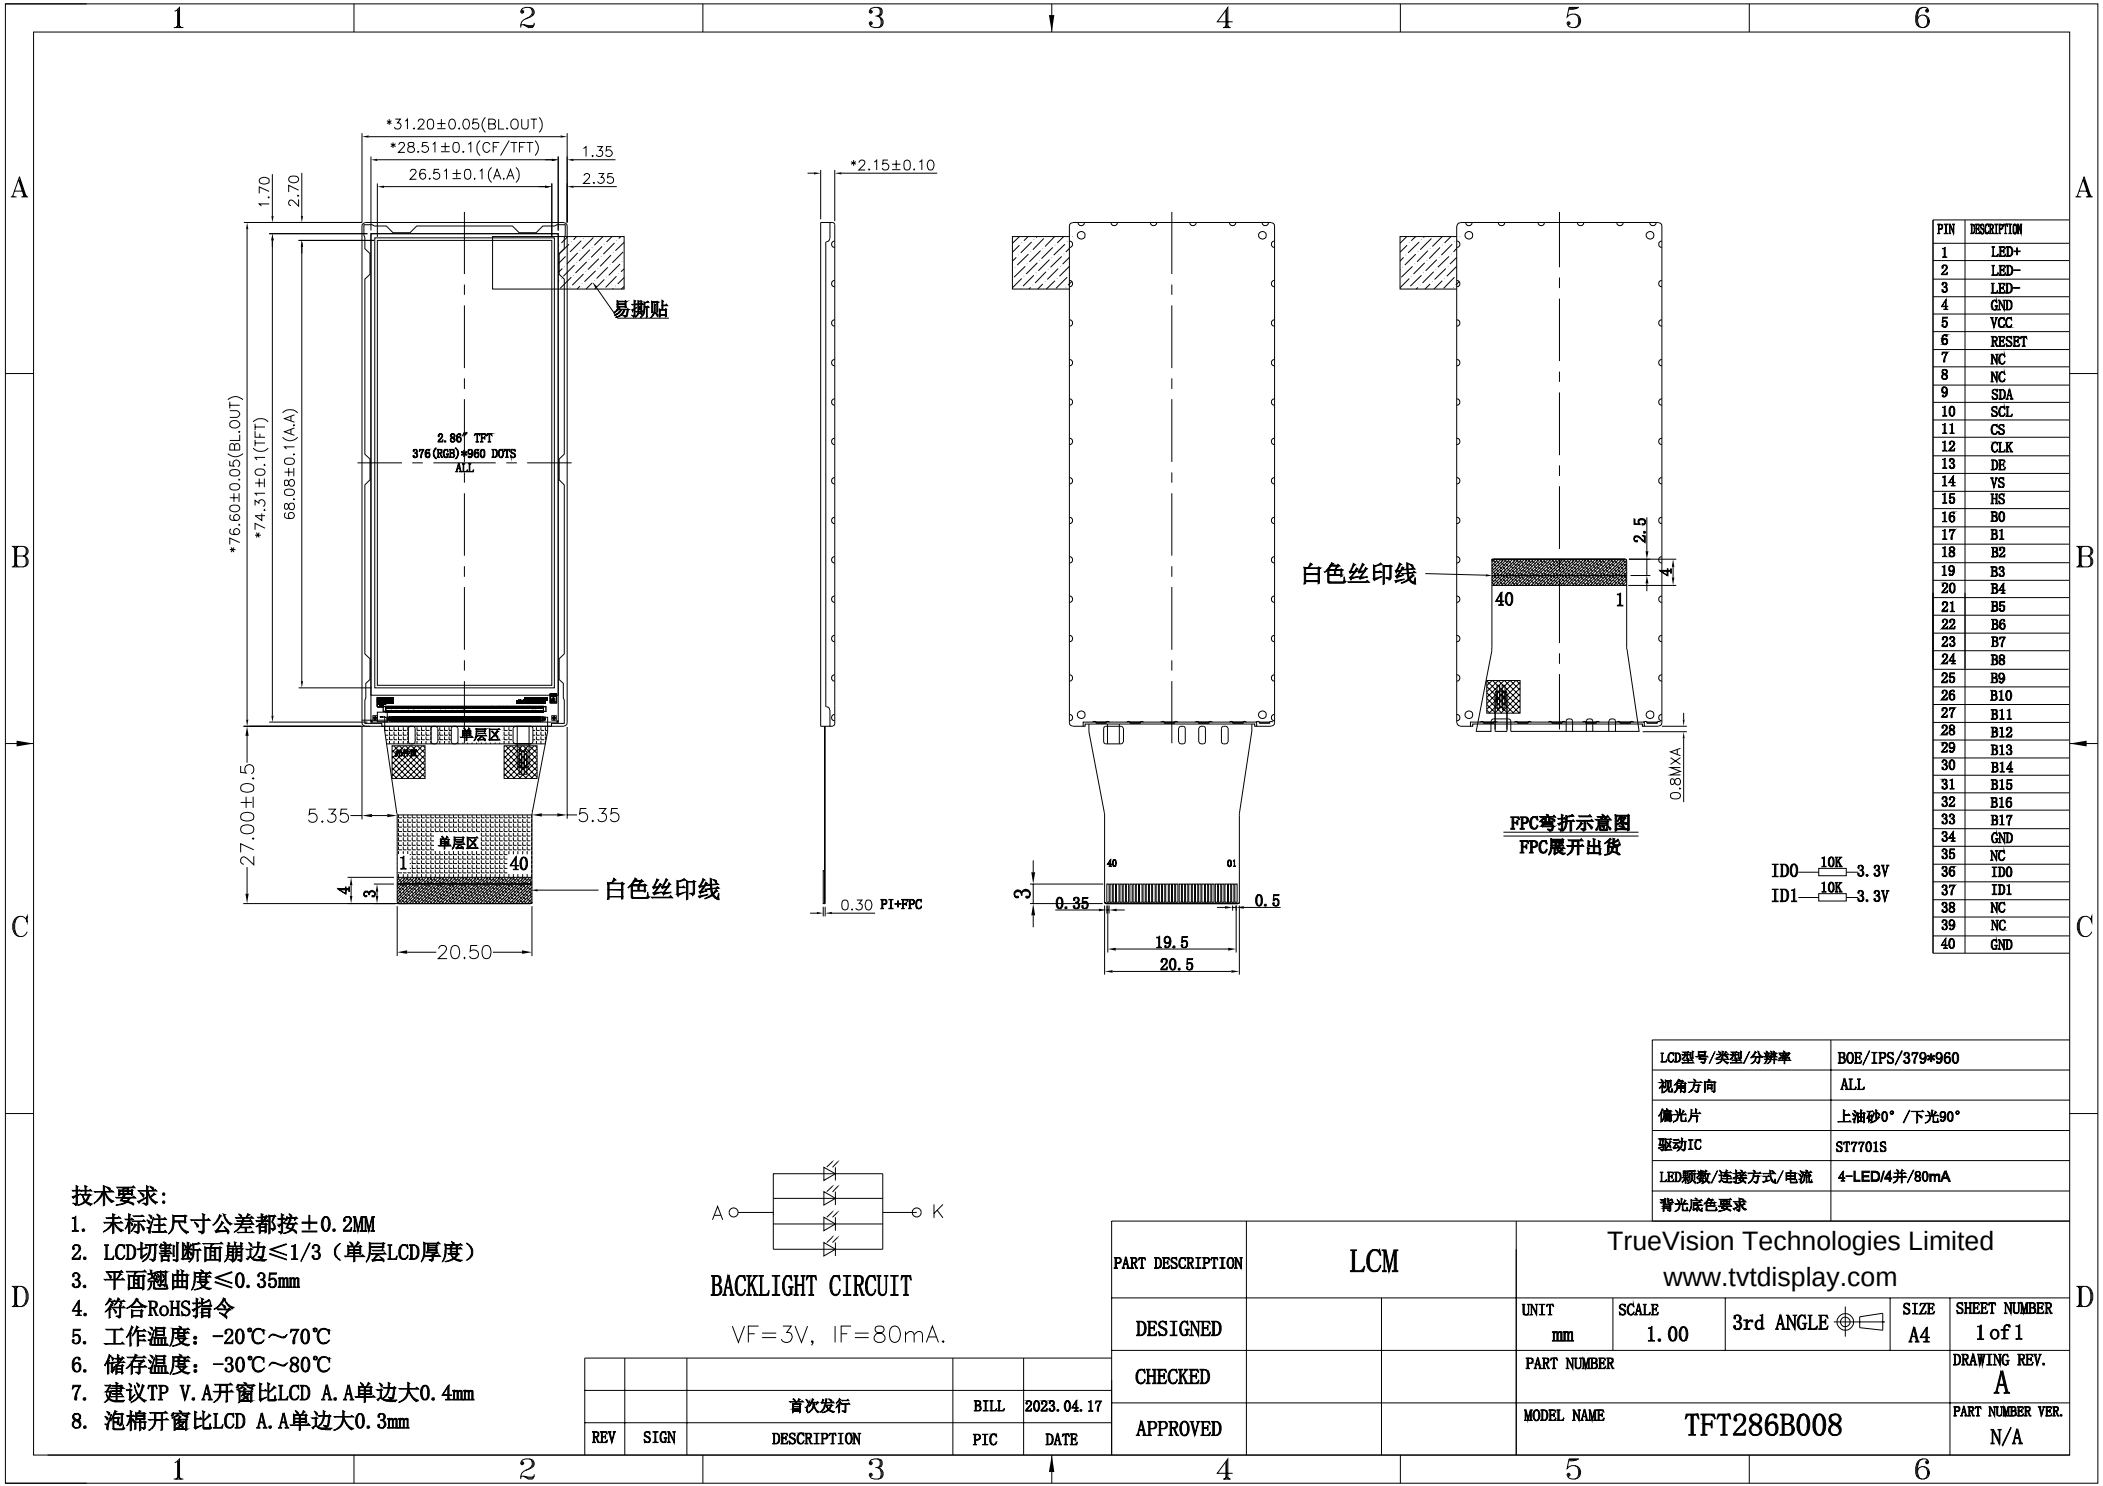

PIN	DESCRIPTION
1	LED+
2	LED-
3	LED-
4	GND
5	VCC
6	RESET
7	NC
8	NC
9	SDA
10	SCL
11	CS
12	CLK
13	DE
14	VS
15	HS
16	B0
17	B1
18	B2
19	B3
20	B4
21	B5
22	B6
23	B7
24	B8
25	B9
26	B10
27	B11
28	B12
29	B13
30	B14
31	B15
32	B16
33	B17
34	GND
35	NC
36	ID0
37	ID1
38	NC
39	NC
40	GND

技术要求:

- 未标注尺寸公差都按±0.2mm
- LCD切割断面崩边≤1/3 (单层LCD厚度)
- 平面翘曲度≤0.35mm
- 符合RoHS指令
- 工作温度: -20℃~70℃
- 储存温度: -30℃~80℃
- 建议TP V. A开窗比LCD A. A单边大0.4mm
- 泡棉开窗比LCD A. A单边大0.3mm



BACKLIGHT CIRCUIT

VF=3V, IF=80mA.

		首次发行	BILL	2023.04.17
REV	SIGN	DESCRIPTION	PIC	DATE

PART DESCRIPTION		LCM		TrueVision Technologies Limited			
				www.tvtdisplay.com			
DESIGNED				UNIT mm	SCALE 1.00	3rd ANGLE	SHEET NUMBER 1 of 1
CHECKED				PART NUMBER			DRAWING REV. A
APPROVED				MODEL NAME			PART NUMBER VER. N/A
				TFT286B008			

LCD型号/类型/分辨率	BOE/IPS/379*960
视角方向	ALL
偏光片	上油砂0° /下光90°
驱动IC	ST7701S
LED颗数/连接方式/电流	4-LED/4并/80mA
背光底色要求	