

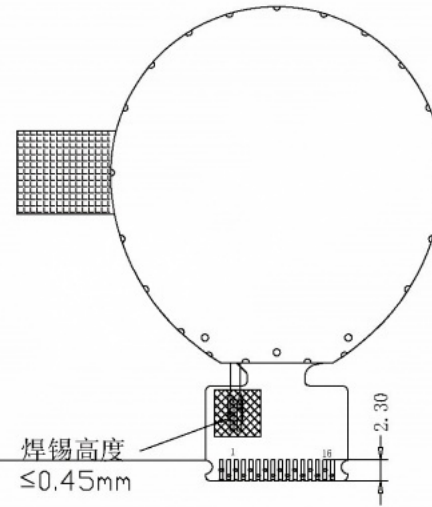


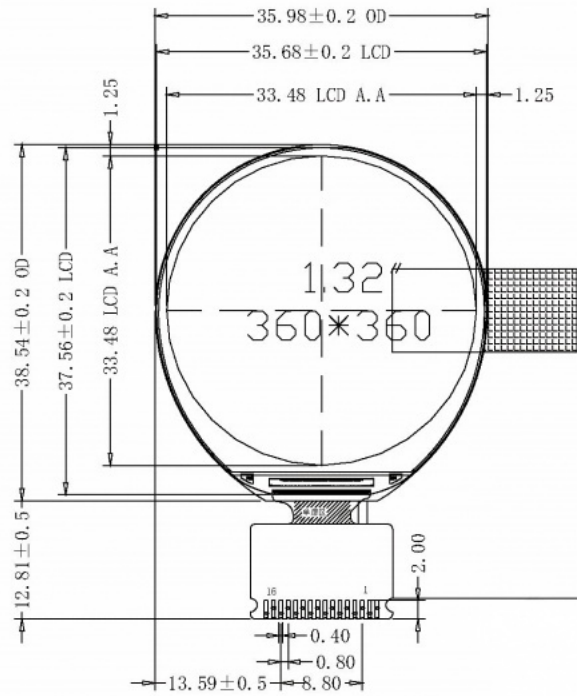

FPC展开出货



LED CIRCUIT DIAGRAM:

- 技术要求:
1. 未标注尺寸公差±0.20MM
 2. LCD切割断面崩边≤1/3 (单层LCD厚度)
 3. 平面翘曲度≤0.35mm
 4. 符合RoHS指令
 5. 工作温度: -20℃~70℃
 6. 储存温度: -30℃~80℃
 7. 建议TP V.A开窗比LCD A.A单边大0.4mm
 8. 泡棉开窗比LCD A.A单边大0.3mm

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	KZH	2023.06.09

PART DESCRIPTION		LCM		TrueVision Technologies Limited www.tvtdisplay.com				
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SIZE A4	SHEET NUMBER 1 of 1	
CHECKED			PART NUMBER				DRAWING REV. A	
APPROVED			MODEL NAME TFT132B013				PART NUMBER N/A	

QSPI

PIN	NAME
1	LEDK
2	LEDA
3	VDD3V3
4	VDD3V3
5	VDD3V3
6	GND
7	TE
8	CLK
9	GND
10	CS
11	RES
12	SPI3
13	SPI2
14	SPI1
15	SPI0
16	GND

LCD型号/类型/分辨率	B0E1.32/IPS/360*360
视觉方向	ALL
贴片方式	上细砂0° /下增亮90°
驱动IC	ST77916
LED颗数/连接方式/电流	2LED/并联/40mA